

# E-TOUCH ICLOUD SETUP

## E-touch / iCloud for Mobile phone software: vMEyeCloud / Android, vMEyeCloud / iPhone

- 1、 Please turn on the DVR
- 2、 Make sure that DVR have already connected the Internet
- 3、 Please link to <http://xmeye.net> on your PC, that should be as below:



- 4、 Please Download Web Active and run the Active
  - a. Install the Active as below:



- b. Press "Next", and get into the next step as below:



**NetSurveillance Setup**


**User Information**  
Enter your user information and click Next to continue.

Name:

Company:

< Back   Next >   Cancel

- c. Press "Next" as below:

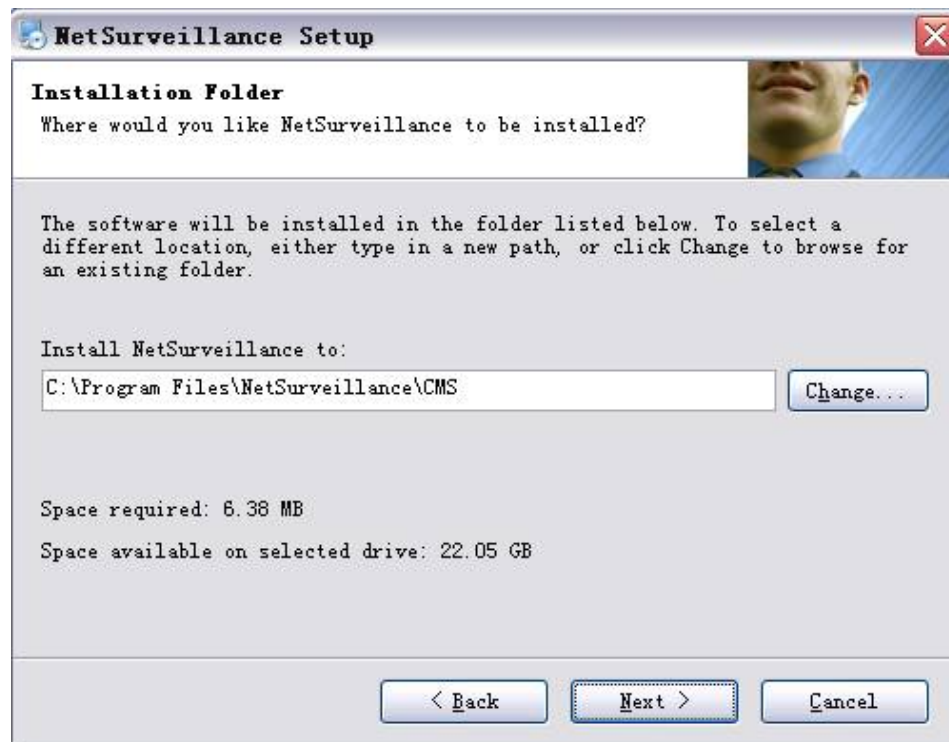

**NetSurveillance Setup**

**Installation Folder**  
Where would you like NetSurveillance to be installed?


The software will be installed in the folder listed below. To select a different location, either type in a new path, or click Change to browse for an existing folder.

Install NetSurveillance to:  
   Change...

Space required: 6.38 MB  
Space available on selected drive: 22.05 GB

< Back   Next >   Cancel

- d. Choose the storage directory, press "Next" as below:

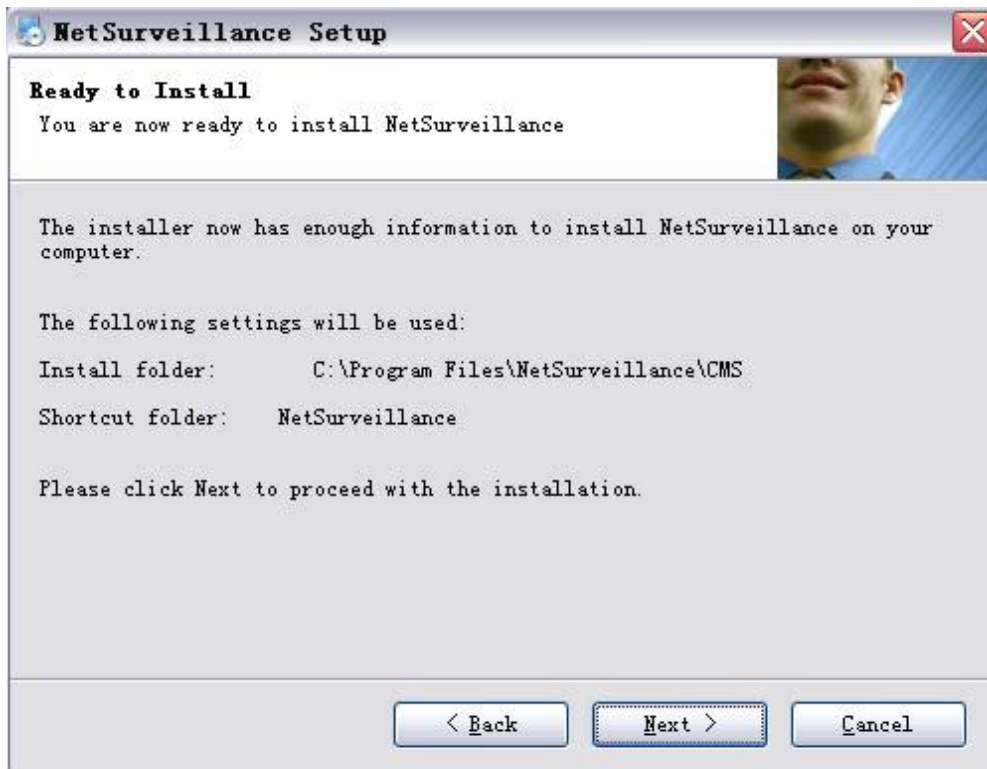

- e. Press "Next" and finish install as below:



5、 After finish install, please get back to: <http://xmeye.net>.

1) Register

a. press Register as below:

Username	<input type="text"/>
True Name	<input type="text"/>
Sex	<input type="text" value="Male"/>
Contact	<input type="text"/>
Address	<input type="text"/>
E-mail	<input type="text"/> (You can get your password back by the E-Mail)
Password	<input type="password"/>
Confirm	<input type="password"/>
<input type="button" value="Ok"/> <input type="button" value="Cancel"/>	

b. Please log in as below:

---

[My Devices](#) | [Device Manage](#) | [User Info](#) | [Logout](#)

**Click "My Devices" to view config and playback,  
It will download the component automatically to your computer. Please wait a moment as it will take several minutes on your first visiting time!**

c. Device Manage and add as below:

My Devices : Device Manage : User Info : Logout

Add

MAC Address	Device Name	Username	Password	Operation
-------------	-------------	----------	----------	-----------

User Info [Edit](#)

Username	kenny lai
True Name	kenny lai
The last login time	2012-08-29 10:55:45

Must be same with DVR

SerialNo.

Device Name

Must be same with DVR

Username


admin (default is "admin")

Must be same with DVR

Password (default is null)

Ok Cancel

Please check the Serial number as below: DVR's main menu —INFO—VERSION-----Serial NO

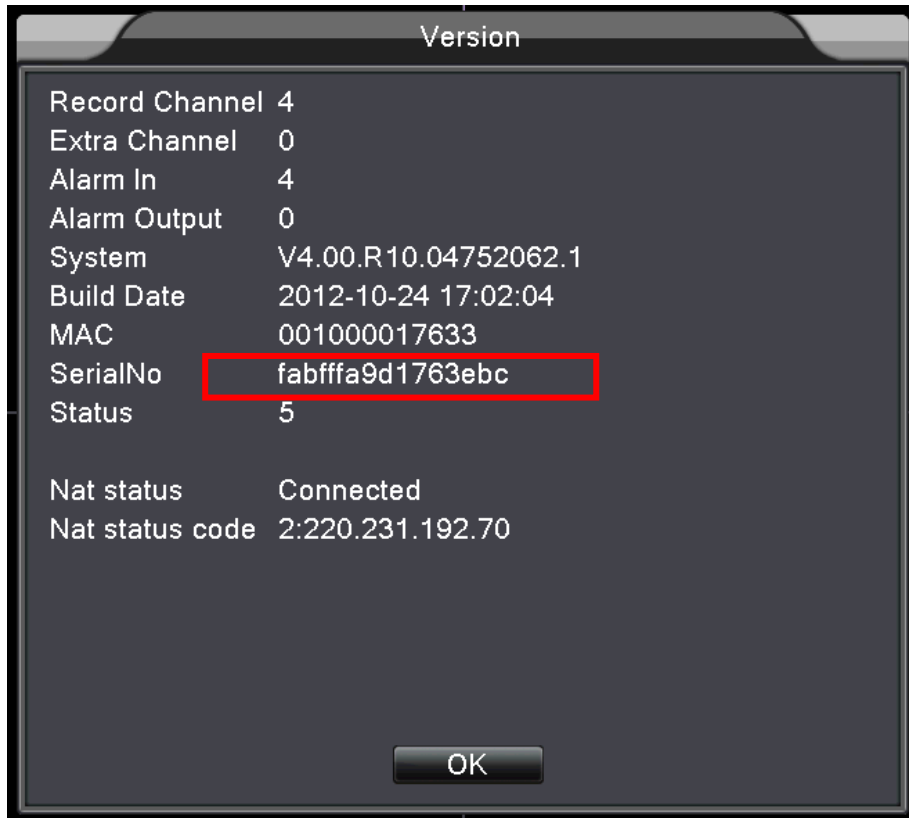

d. After setting, press "My Devices" as below:

