


NASTAVENÍ E-TOUCH ICLOUD

E-touch / iCloud pro software mobilního telefonu: vMEyeCloud / Android, vMEyeCloud / iphone

1. Prosím, zapněte DVR
2. Ujistěte se, že DVR je připojený k internetu
3. Prosím, připojte se vaším počítačem na odkaz <http://xmeye.net>, kde se zobrazí:

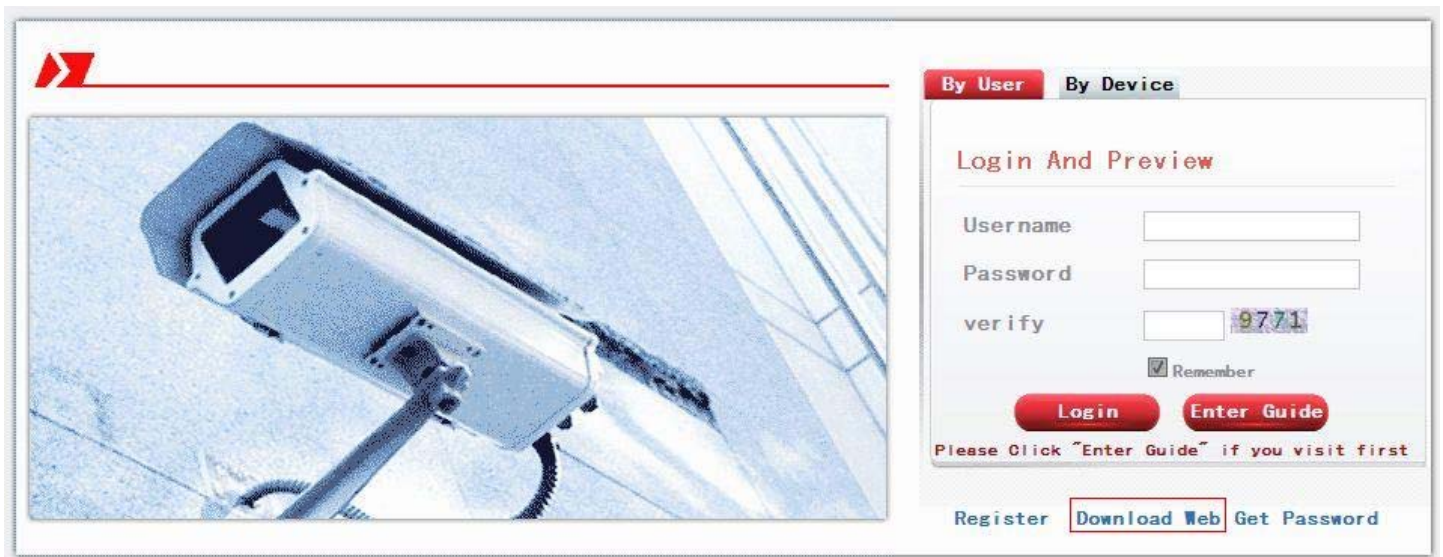

4. Prosím, stáhněte si a spusťte službu Active
 - a. V následujících krocích si nainstalujte službu Active, jak je uvedeno níže:



- b. Stiskněte "Next" a přejděte na další krok, jak je uvedeno výše:




The screenshot shows a window titled "NetSurveillance Setup" with a close button in the top right corner. The main heading is "User Information" and the instruction reads "Enter your user information and click Next to continue." There are two text input fields: "Name:" and "Company:". At the bottom, there are three buttons: "< Back", "Next >" (which is highlighted with a dotted border), and "Cancel".

- c. Stiskněte "Next", jak je uvedeno výše:



The screenshot shows a window titled "NetSurveillance Setup" with a close button in the top right corner. The main heading is "Installation Folder" and the instruction reads "Where would you like NetSurveillance to be installed?". Below this, there is explanatory text: "The software will be installed in the folder listed below. To select a different location, either type in a new path, or click Change to browse for an existing folder." A text input field contains the path "C:\Program Files\NetSurveillance\CMS" and a "Change..." button is to its right. At the bottom, there are three buttons: "< Back", "Next >" (highlighted with a dotted border), and "Cancel".

- d. Vyberte adresář pro uložení instalace a stiskněte tlačítko "Next", jak je uvedeno výše:

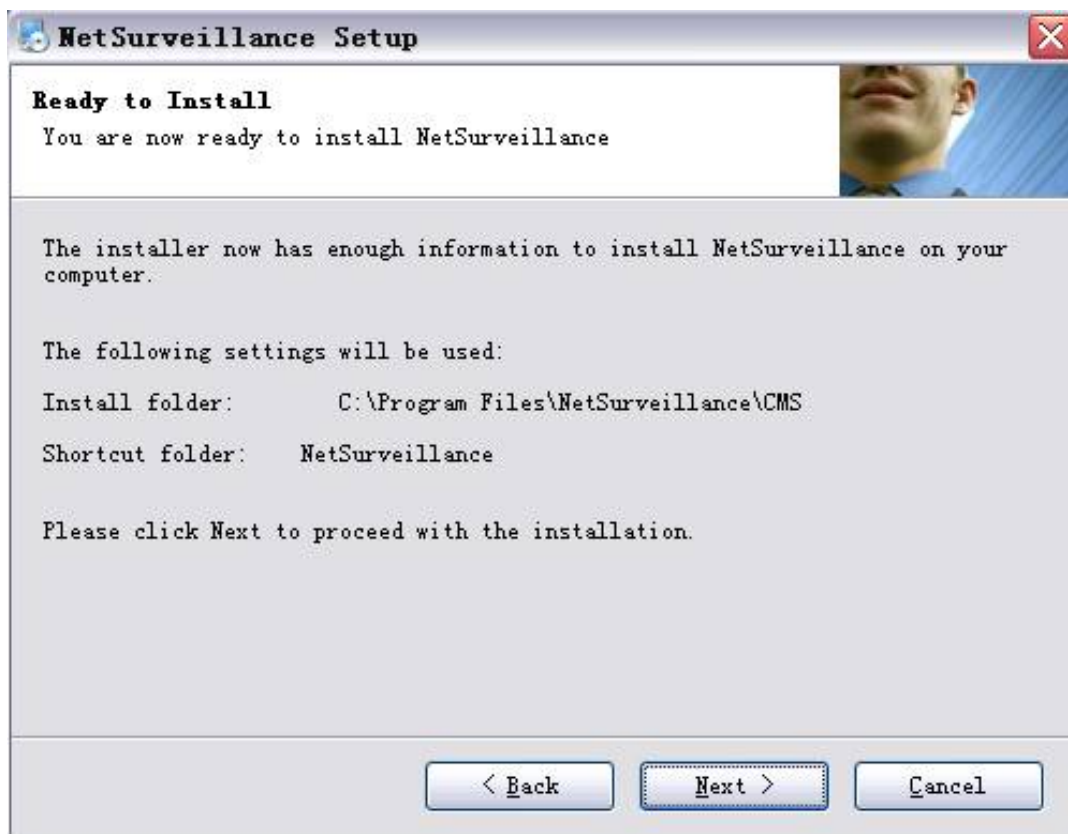

- e. Stiskněte "Next" a následně "Finish" pro dokončení instalace (viz výše a níže):



5. Po dokončení instalace, prosím, vraťte se zpátky na: <http://xmeye.net>.

1) Registrace

a. Stiskněte "Register", jak je uvedeno níže:

Username	<input type="text"/>
True Name	<input type="text"/>
Sex	<input type="text" value="Male"/>
Contact	<input type="text"/>
Address	<input type="text"/>
E-mail	<input type="text"/> (You can get your password back by the E-Mail)
Password	<input type="text"/>
Confirm	<input type="text"/>
<input type="button" value="Ok"/> <input type="button" value="Cancel"/>	

b. Prosím, přihlaste se, jak je uvedeno níže:

My Devices Device Manage User Info Logout	
<input type="button" value="Refresh Stat"/>	<p>Click "My Devices" to view config and playback, It will download the component automatically to your computer. Please wait a moment as it will take several minitues on your first visiting time!</p>

c. Zpráva zařízení a doplnění údajů jak je uvedeno níže:

My Devices : Device Manage : User Info : Logout

Add

MAC Address	Device Name	Username	Password	Operation
-------------	-------------	----------	----------	-----------

User Info [Edit](#)

Username	kenny lai
True Name	kenny lai
The last login time	2012-08-29 10:55:45

Musí být stejné s DVR

Serial No.

Device Name

Musí být stejné s DVR

Username

admin (default is "admin")


Musí být stejné s DVR

Password

(default is null)

Ok Cancel

Prosím, zkontrolujte sériové číslo, jak je uvedeno níže: :
DVR hlavní menu—Informace —Verze-----Sériové číslo
(DVR's main menu —INFO—VERSION-----Serial NO)

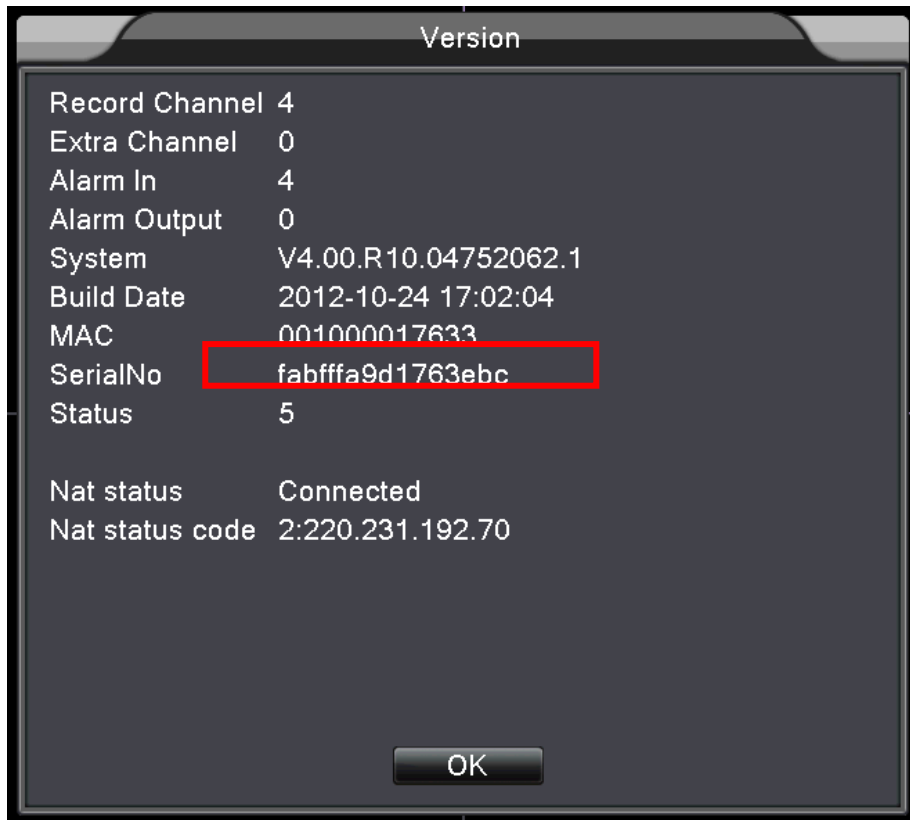

d. Po nastavení, stiskněte “My Devices”, jak je uvedeno níže:

